

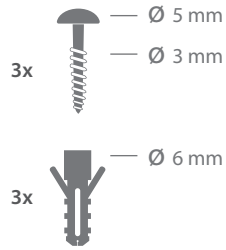
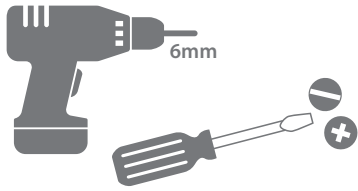



NEEDED TO START (OPTIONAL) (EXCL.)





3x AA +  
(required)





BOX CONTENT | INHALT | CONTENUS | INHOUD DOOS | CONTENUTO | CONTENIDO DE LA CAJA





FIRST SET-UP | ERSTEINRICHTUNG | PREMIÈRE CONFIGURATION | EERSTE INSTALLATIE | PRIMO SET-UP | PRIMERA CONFIGURACIÓN

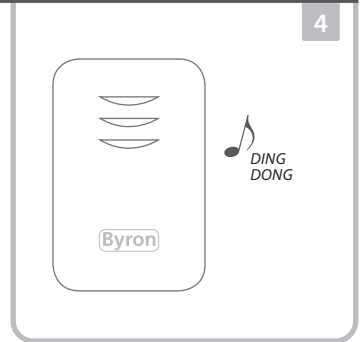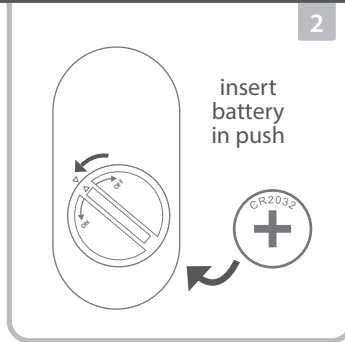

INSTALLATION | INSTALLATION | INSTALLATION | INSTALLATIE | INSTALLAZIONE | INSTALACIÓN



PAIRING MULTIPLE CHIMES | KOPPELN MEHRERER KLINGELN | JUMELAGE DE PLUSIEURS CARILLONS | MEERDERE DEURBELLEN KOPPELEN | ACCOPPIAMENTO MULTIPLO | EMPAREJANDO MÚLTIPLES TIMBRES

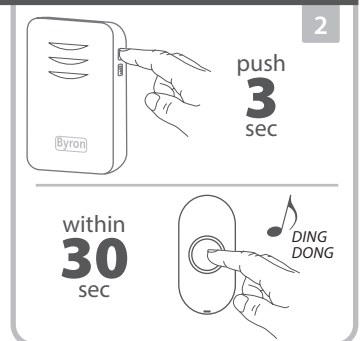

FEATURES | EIGENSCHAFTEN | CARACTERÍSTICAS | KENMERKEN | CARATTERISTICHE | CARACTERÍSTICAS

<p>16</p>	<p>1</p>	<p>2</p>
	<p>1</p>	<p>2</p>


PAIRING | PAARUNG | JUMELAGE | KOPPELEN | ACCOPPIAMENTO | EMPAREJAMIENTO

<p>1</p>	<p>2</p> <p>push <b>3</b> sec</p>	<p>3</p> <p>within <b>30</b> sec</p> <p>DING DONG</p>
----------	-----------------------------------	---

TROUBLESHOOTING | FEHLERBEHEBUNG | RÉOLUTION DE PROBLÈMES | PROBLEMEN OPLOSSEN | RISOLUZIONE DEI PROBLEMI | SOLUCIÓN DE PROBLEMAS

<p>1</p> <p><b>RESET</b></p> <p>hold <b>10</b> sec</p>	<p>2</p> <p>BEEP BEEP BEEP</p>	
--	--	--

WWW.CHBYRON.EU



Find us on



Or contact us directly:

EU address:	UK address:
<p><b>smartwares</b> Europe</p> <p>Swaardvenstraat 65 5048 AV Tilburg The Netherlands www.chbyron.eu</p>	<p><b>smartwares</b> Safety and Lighting Ltd.</p> <p>Meriden House, 6 Great Cornbow Halesowen, West Midlands, B63 3AB United Kingdom</p>



Conforms to all relevant European Directives.

Frequency band: 433.92MHz (433.050 - 434.790 MHz)  
Maximum radio-frequency power: +5.92dB  
Range: 150 meters

Rated current: 150mA

**Wireless Doorbell DBY-22351BS**  
Power: 3 x AA/LR6 1.5V: Total 4.5V  
Operating temperature: 0°C to 40°C  
Indoor Use Only

**Push button - DBY-23510B**  
Power supply: 1 x CR2032 3V  
Operating temperature: -25°C to 50°C  
IP44 Weather Resistant

