

## ToLEDo G9 DIMMABLE

ToLEDo G9 350LM DIM 827 SL  
0029674



### Product features

- LED dimmable retrofit replacement for halogen G9 mains voltage capsules
- Compact design
- Omni-directional light distribution
- 350lm = 32W halogen G9 lamp
- High lumen efficacy: 109lm/W
- 85% energy saving
- Dimmable
- Suitable for chandeliers, interior display, shop windows, decorative and general lighting applications



## PRODUCT OVERVIEW

Product name	ToLEDo G9 350LM DIM 827 SL
Technology	LED
Watt (Rated) (W)	3.2
Fixture rating	Open
General application	Hospitality, Museums & Galleries, Residential & Consumer, Retail
ETIM Class	EC001959
E-number FI	4741135
Warranty	3 years
Luminous flux (lm)	350
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Wattage (W)	3.2

## ToLEDo G9 DIMMABLE

ToLEDo G9 350LM DIM 827 SL  
0029674

Dimmable	Yes
Average life (Nominal) (h)	15000
Product EAN number	5410288296746

### DATA TABLE

#### General data

Product name	ToLEDo G9 350LM DIM 827 SL
Technology	LED
Watt (Rated) (W)	3.2
Fixture rating	Open
General application	Hospitality, Museums & Galleries, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741135
Warranty	3 years

#### Optical data

Luminous flux (lm)	350
Luminous flux (Rated) (lm)	350
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

#### Electrical data

Wattage (W)	3.2
Equivalent watt (W)	30
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	Yes
Inrush Current (A)	0.09
Inrush Duration (µs)	1500
Lamp Energy Label (class)	F
Max. products per 16A C Breaker	615
Max. products per 16A B Breaker	369

#### Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000

## ToLEDo G9 DIMMABLE

ToLEDo G9 350LM DIM 827 SL  
0029674

Average life (Rated) (h)	15000
--------------------------	-------

### Physical data

Nominal Product Length (mm)	59
Nominal Product Diameter (mm)	18
Weight (kg)	0.04


### Packaging

Single packaging type	Carton
Product EAN number	5410288296746
Packaging single length / height (cm)	6.1
Packaging single width (cm)	5.1
Packaging single depth (cm)	8.2
DUN14 (inner)	25410288296740
Units per inner package	6
Packaging inner length / height (cm)	16.4
Packaging inner width (cm)	13.2
Packaging inner depth (cm)	9.3
DUN14 (outer)	15410288296743
Units per outer package	48
Packaging outer length / height (cm)	34.6
Packaging outer width (cm)	28.2
Packaging outer depth (cm)	20.8

### Safety data


Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

## PHOTOMETRY

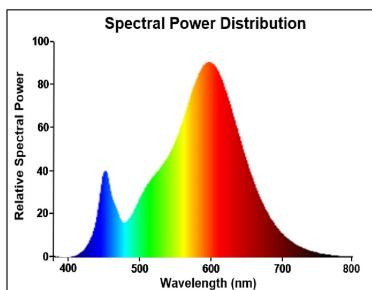


ToLEDo G9 DIMMABLE  
*ToLEDo G9 350LM DIM 827 SL*  
0029674

## TECHNICAL DRAWINGS



0029674

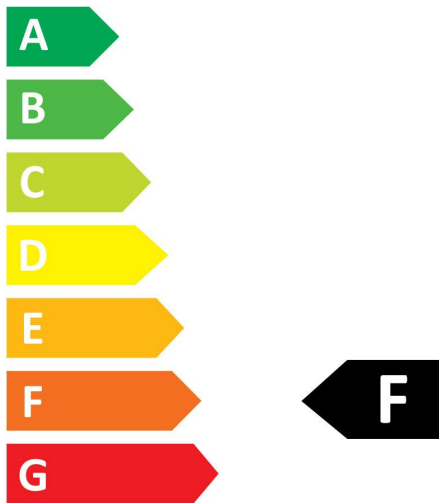

**4**  
kWh/1000h



2019/2015

# SYLVANIA

ToLEDo G9 DIMMABLE  
*ToLEDo G9 350LM DIM 827 SL*  
0029674



0029674



**4**  
kWh/1000h



2019/2015